

HOTRACO HELPS



Water counters

Hotraco Agri BV

Stationsstraat 142, NL - 5963 AC Hegelsom, P.O. Box 6086, 5960 AB Horst, The Netherlands
Tel: +31 (0)77 3275020 Fax: +31 (0)77 3275021 Internet: www.hotraco.com

General


Water counters in poultry keeping

| Type counter | Broilers | Laying hens |
|--------------|-----------------|-----------------|
| LT-15 | 20.000 – 50.000 | 15.000 – 30.000 |
| LT-25 | 50.000 - 80.000 | 30.000 – 60.000 |
| LT-60 | < 200.000 | < 145.000 |
| LT-Q1,5 | 20.000 – 50.000 | 15.000 – 30.000 |

Water consumption

Laying hens: 0,4 liter/animal/day 20% of the daily consumption can be used up in a peak hour.
 Broilers: 0,3 liter/animal/day 20% of the daily consumption can be used up in a peak hour.

| Type counter | Measuring range (liters per hour) | Min. / max. measuring range (liters per hour) | Pulses per liter |
|--------------|-----------------------------------|---|------------------|
| LT-15 | 1500 | 30 – 3000 | 1 |
| LT-25 | 2500 | 30 – 5000 | 1 |
| LT-60 | 6000 | 70 - 12000 | 1 |
| LT-Q1,5 | 1500 | 15 – 3000 | 1 |

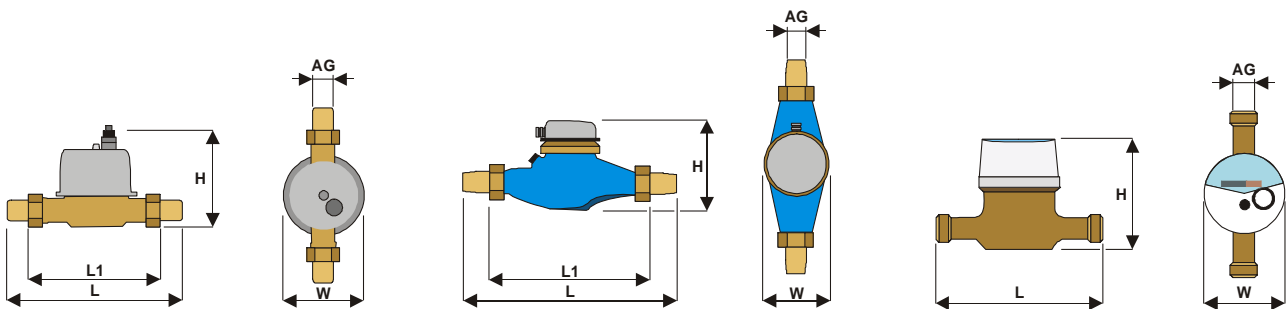

| Dimensions | LT-15 | LT-25 | LT-60 | LT-Q1,5 |
|------------|-------|-------|--------|---------|
| L | 190 | 288 | 378 | 190 |
| L1 | 110 | 190 | 260 | - |
| H | 100 | 151 | 159 | 115 |
| W | 80 | 96 | 104 | 85 |
| AG | 3/4" | 1" | 1 1/4" | 3/4" |

* Water counters are generally equipped with a pulse sensor.